


Secondo ISO 7465

Materiale : Acciaio Fe 360 B

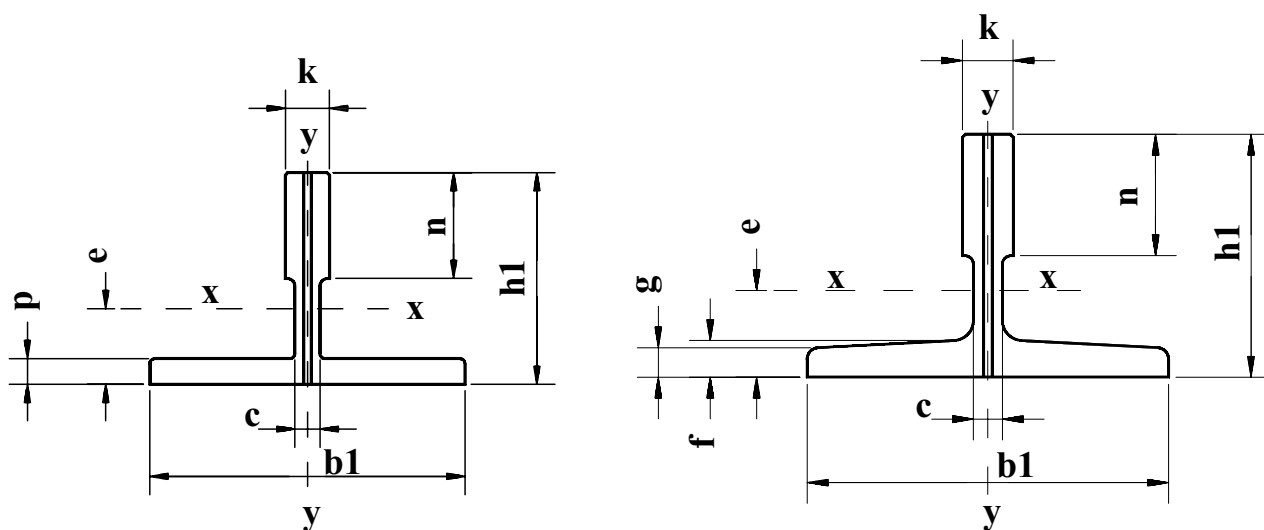

Profilo		GF 509	GF 765	GF 770	GF 762	GF 755	GF 654	GF 829	GF 890	GF 965	GF 975	GF 125
Dimen.		50x50x9	70x65x9	70x70x9	75x62x10	75x55x10	65x54x8	82.5x68.2x9	89x62x15.88	90x65x14	90x75x16	125x82x16
ISO 7465			T70-1/A		T75-3/A			T82/A	T89/A		T90/A	T125/A
h1	mm	50	65	70	62	55	54	68.25	62	65	75	82
b1	mm	50	70	70	75	75	65	82.5	89	90	90	125
k	mm	9	9	9	10	10	8	9	15.88	14	16	16
n	mm	35	34	35	30	30	20	25.4	33.4	35	42	42
c	mm	7.5	6	8	8	7	5	7.5	10	10	10	10
g	mm						4	6	7.9	8	8	9
f	mm						6	8.25	11.1	10	10	12
p	mm	6.5	7	8.5	7.5	7.5						
Sezione S	cm ²	7.04	9.51	11.22	10.99	9.94	6.3	10.9	15.7	15.1	17.35	22.83
Peso q1	Kg/m	5.54	7.47	8.83	8.63	7.82	4.96	8.55	12.3	11.88	13.55	17.9
e	cm	1.7	2.04	2.11	1.86	1.63	1.7	1.98	2.02	2.06	2.61	2.43
Ixx	cm ⁴	17.33	41.3	52.77	40.35	28.56	20.18	49.4	59.52	62.77	102	151
Wxx	cm ³	5.25	9.24	10.79	9.29	7.39	5.45	10.2	14.25	14.12	20.87	26.2
ixx	cm	1.57	2.09	2.17	1.92	1.7	1.79	2.13	1.95	2.04	2.43	2.57
Iyy	cm ⁴	7.01	18.65	24.62	26.49	26.67	10.51	30.5	52.4	52.98	52.6	159
Wyy	cm ³	2.8	5.35	7.03	7.06	7.11	3.23	7.4	11.8	11.77	11.8	25.4
iyy	cm	1	1.4	1.48	1.55	1.64	1.29	1.67	1.83	1.87	1.75	2.64

**DIMENSIONI E CARATTERISTICHE
GUIDE TRAFILATE**



Start Elevator Srl


08 101 / I

rev. 1

1/2

Secondo ISO 7465

Materiale : Acciaio Fe 360 B

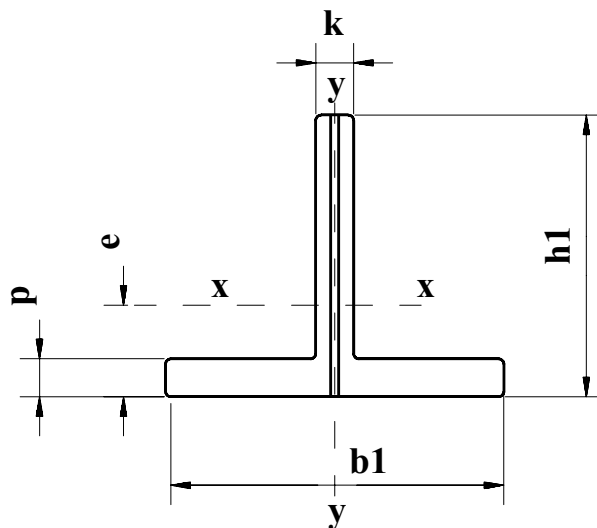

Profilo		GL 445	GL 506	GL 607	GL 505	GL 809	GL 708
Dimen.		45x45x5	50x50x6	60x60x7	50x50x5	80x80x9	70x70x8
ISO 7465		T45/A			T50/A		T70-2/A
h1	mm	45	50	60	50	80	70
	mm	45	50	60	50	80	70
k	mm	5	6	7	5	9	8
p	mm	5	6	7	5	9	8
Sezione S	cm ²	4.25	5.64	7.91	4.75	13.59	10.52
Peso q1	Kg/m	3.34	4.44	6.23	3.73	10.7	8.26
e	cm	1.31	1.47	1.76	1.43	2.33	2.02
Ixx	cm ⁴	8.08	13.13	26.58	11.24	81.5	47.43
Wxx	cm ³	2.53	3.72	6.27	3.15	14.37	9.63
ixx	cm	1.38	1.53	1.83	1.54	2.45	2.12
Iyy	cm ⁴	3.84	6.33	12.75	5.25	38.83	23.13
Wyy	cm ³	1.71	2.53	4.25	2.1	9.71	6.61
iyy	cm	0.95	1.06	1.27	1.05	1.69	1.48

