


Secondo ISO 7465

Materiale : Acciaio Fe 430 B

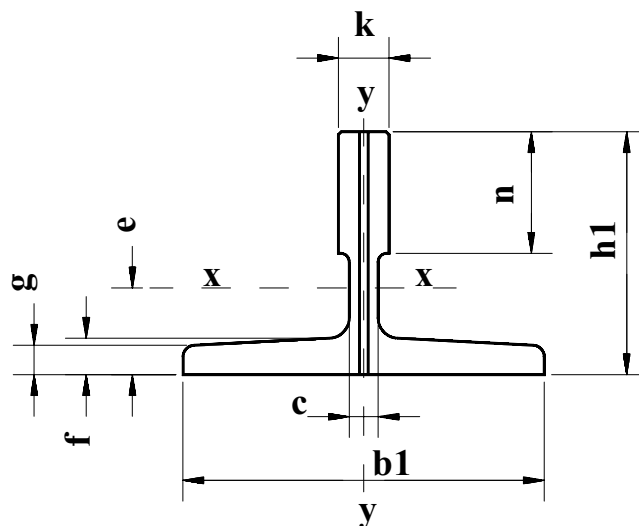

Profilo		GM 890	GM 975	GM 125	GM 127-1	GM 127-2	GM 127-3	GM 140-1	GM 140-2
Dimen.		89x62x15.88	90x75x16	125x82x16	127x88.9x15.88	127x88.9x15.88	127x88.9x15.88	140x108x19	140x102x28.6
ISO 7465		T89 /B	T90 /B	T125 /B	T127 1/B	127 2/B	127 3/B	140 1/B	140 2/B
h1	mm	62	75	82	88.9	88.9	88.9	108	102
b1	mm	89	90	125	127	127	127	140	140
k	mm	15.88	16	16	15.88	15.88	15.88	19	28.6
n	mm	33.4	42	42	44.5	50.8	50.8	50.8	50.8
c	mm	10	10	10	10	10	14	12.7	17.5
g	mm	7.9	8	9	7.9	12.7	12.7	12.7	14.5
f	mm	11.1	10	12	11.1	15.9	15.9	15.9	17.5
Sezione S	cm ²	15.7	17.25	22.83	22.64	28.63	29.56	35.2	43.22
Peso q1	Kg/m	12.3	13.55	17.90	17.77	22.48	23.26	27.6	33.92
e	cm	2.02	2.61	2.43	2.75	2.47	2.47	3.24	3.47
Ixx	cm ⁴	59.52	102	151	186.2	198.4	199.37	404	457
Wxx	cm ³	14.25	20.87	26.2	30.4	30.9	31.05	53.4	68
ixx	cm	1.95	2.43	2.57	2.87	2.63	2.60	3.39	3.25
Iyy	cm ⁴	52.4	52.6	159	148	230	234.34	310	358
Wyy	cm ³	11.8	11.8	25.4	23.4	36.2	36.9	44.3	51.2
iyy	cm	1.83	1.75	2.64	2.87	2.83	2.82	2.97	2.88

**DIMENSIONI E CARATTERISTICHE
GUIDE LAVORATE**



Start Elevator Srl

08 111 / 1

rev. 1

1/1